


## Three-Terminal Positive Voltage Regulator

## KA180O05

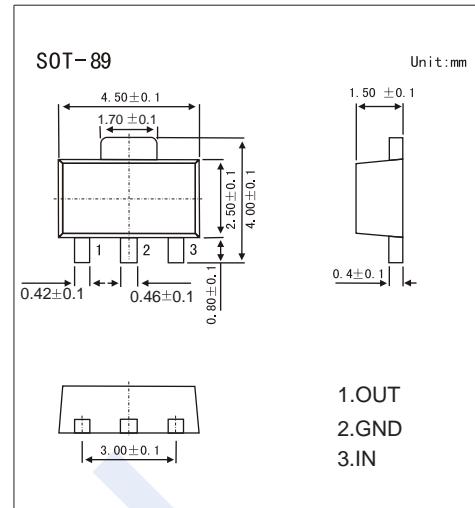

## ■ Features

- Maximum Output current  $I_o$ : 0.1A
- Output Voltage  $V_o$ : 5V
- Continuous Total Dissipation  $P_D$ : 0.5W ( $T_a = 25^\circ C$ )
- Marking Code: KL05


## ■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Rating	Unit
Input Voltage	$V_I$	30	V
Operating Junction Temperature Range	$T_{OPR}$	-55 ~ +125	°C
Storage Temperature Range	$T_{STG}$	-55 ~ +150	°C

■ Electrical Characteristics ( $V_I=10V$ ,  $I_o=40mA$ ,  $C_I=0.33\mu F$ ,  $C_O=0.1\mu F$ , unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	$V_o$	$T_J = 25^\circ C$	4.8	5.0	5.2	V
		$T_J = 0 \sim 125^\circ C$ , $7V \leq V_I \leq 20V$ , $I_o=1mA \sim 40mA$	4.75	5.0	5.25	V
		$T_J = 0 \sim 125^\circ C$ , $I_o=1mA \sim 70mA$	4.75	5.0	5.25	V
Load Regulation	$\Delta V_o$	$T_J = 25^\circ C$ , $I_o=1mA \sim 100mA$	15	60	60	mV
		$T_J = 25^\circ C$ , $I_o=1mA \sim 40mA$	8	30	30	mV
Line Regulation	$\Delta V_o$	$7V \leq V_I \leq 20V$	32	150	150	mV
		$T_J = 25^\circ C$ , $8V \leq V_I \leq 20V$	26	100	100	mV
Quiescent Current	$I_Q$	$T_J = 25^\circ C$	3.8	6	6	mA
Quiescent current Change	$\Delta I_Q$	$T_J = 0 \sim 125^\circ C$ , $8V \leq V_I \leq 20V$		1.5		mA
		$T_J = 0 \sim 125^\circ C$ , $1mA \leq I_o \leq 40mA$		0.1		
Output Noise Voltage	$V_N$	$T_J = 25^\circ C$ , $10Hz \leq f \leq 100KHz$	42			μV
Ripple Rejection	$RR$	$T_J = 0 \sim 125^\circ C$ , $8V \leq V_I \leq 20V$ , $f = 120Hz$	41	49		dB
Dropout Voltage	$V_D$	$T_J = 25^\circ C$		1.7		V

## ■ Typical Application

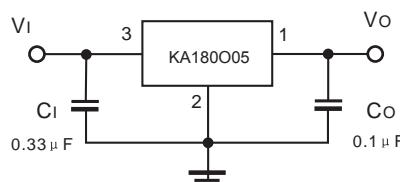

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

**KA180O05**

## ■ Typical Characteristics

