


Schottky Diodes

1KK2102A ~ 1KK2120A

■ Features

- Reverse Voltage - 20 to 200 V
- Forward Current - 1.0 A
- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

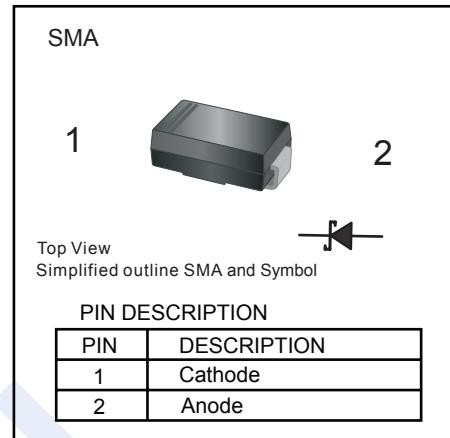

■ Absolute Maximum Ratings and Electrical characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	1KK 2102A	1KK 2104A	1KK 2106A	1KK 2108A	1KK 2110A	1KK 2112A	1KK 2115A	1KK 2120A	Unit						
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V						
Maximum RMS voltage	V_{RMS}	14	28	42	56	70	84	105	140							
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200							
Maximum Instantaneous Forward Voltage at 1A	V_F	0.55		0.70		0.85		0.90								
Maximum Averaged Forward Rectified Current	$I_{F(AV)}$	1								A						
Peak Forward Surge Current, 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I_{FSM}	30														
Maximum DC Reverse Current $T_a=25^\circ\text{C}$ at rated DC blocking voltage $T_a=100^\circ\text{C}$	I_R	0.3		0.2		0.1		2		mA						
Typical Junction Capacitance *1	C_j	110		80						pF						
Typical Thermal Resistance *2	R_{JA}	90								°C/W						
Operating Junction Temperature Range	T_j	-55 ~ +125								°C						
Storage Temperature Range	T_{stg}	-55 ~ +150														

* 1 Measured at 1MHz and applied reverse voltage of 4V D.C.

* 2 P.C.B. mounted with 2.0" × 2.0" (5×5 cm) copper pad areas.

■ Marking

NO.	1KK 2102A	1KK 2104A	1KK 2106A	1KK 2108A	1KK 2110A	1KK 2112A	1KK 2115A	1KK 2120A
Marking	1A02	1A04	1A06	1A08	1A10	1A12	1A15	1A20

Schottky Diodes

1KK2102A ~ 1KK2120A

■ Typical Characteristics

Fig.1 Forward Current Derating Curve

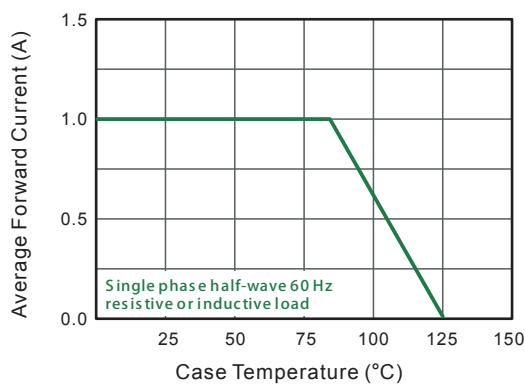


Fig.2 Typical Reverse Characteristics

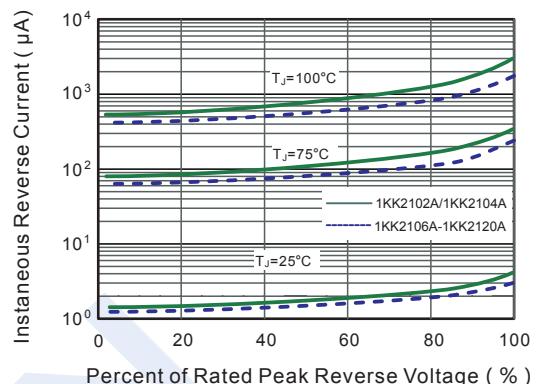


Fig.3 Typical Forward Characteristic

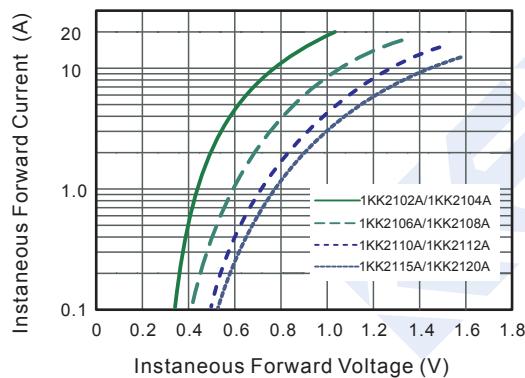


Fig.4 Typical Junction Capacitance

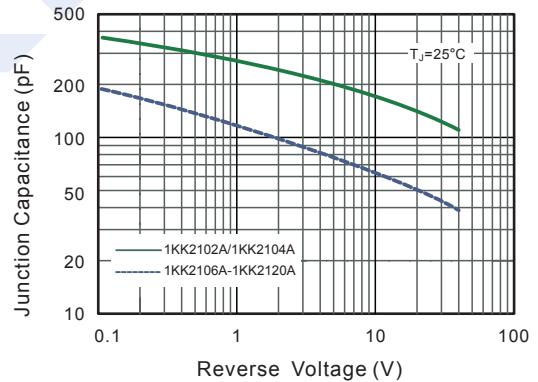


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


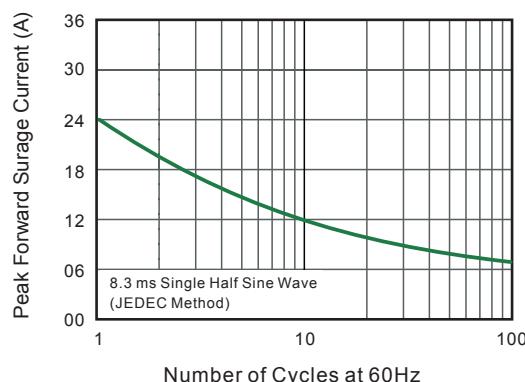


Fig.6- Typical Transient Thermal Impedance

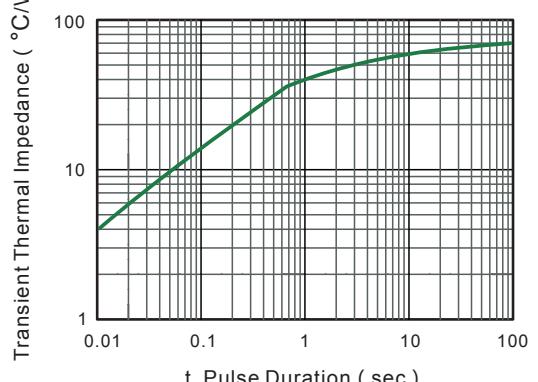


Schottky Diodes

1KK2102A ~ 1KK2120A

■ Package Outline Dimensions

Plastic surface mounted package; 2 leads

SMA

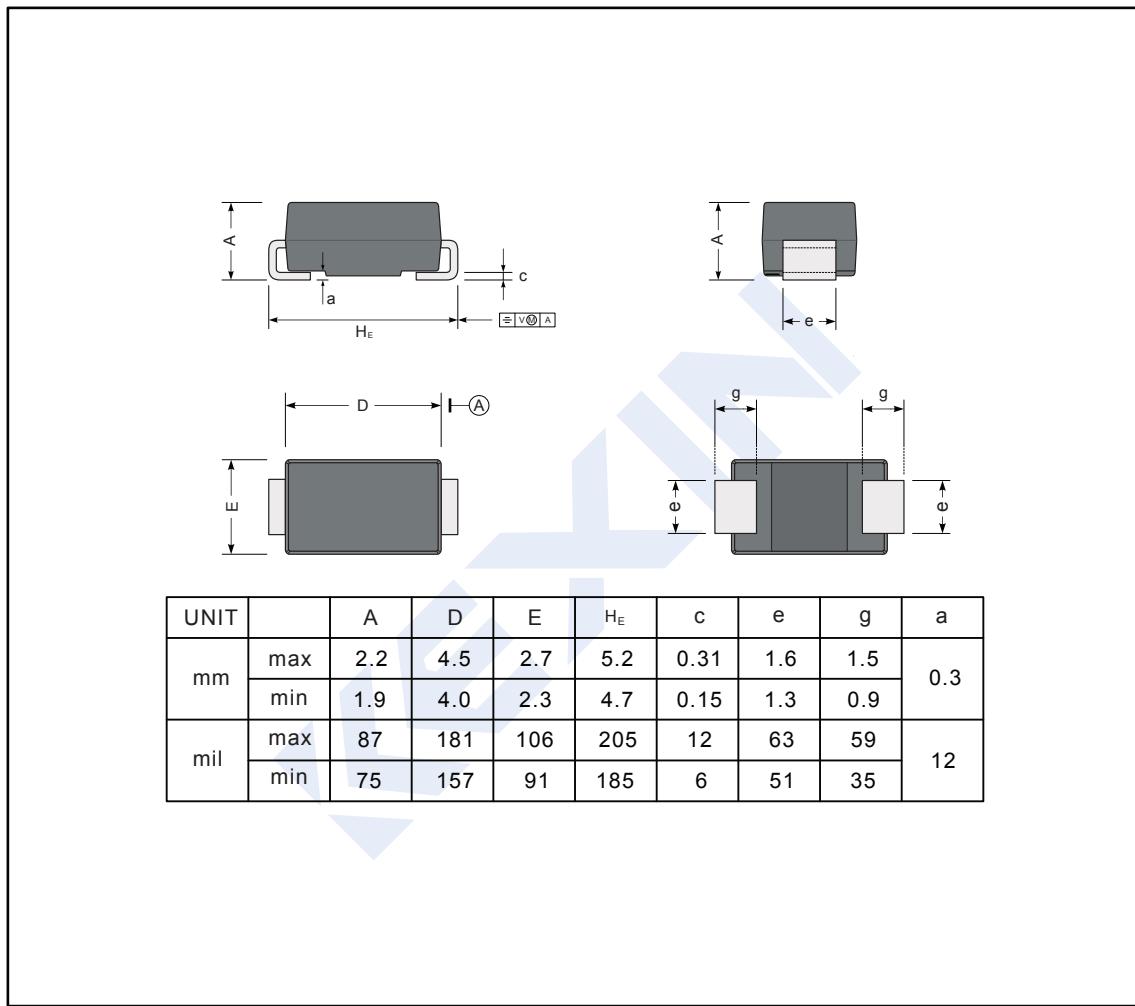

■ The recommended mounting pad size

