


Three Terminal Positive Voltage Regulator

KA280M06

■ Features

- Maximum Output Current:
 $I_{OM} = 500\text{mA}$
- Output Voltage:
 $V_O = 6\text{V}$
- Continuous Total Dissipation:
 $PD = 1.25\text{W}$ ($T_a = 25^\circ\text{C}$)

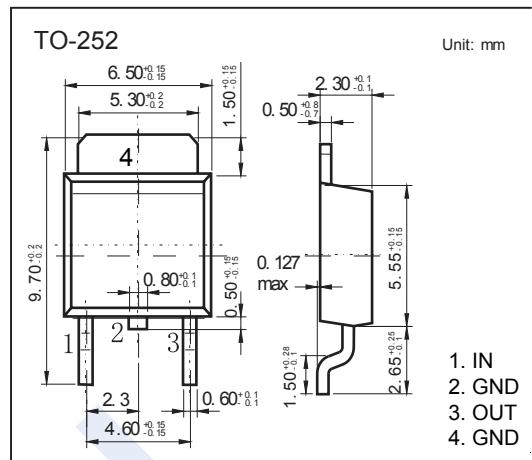

■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise noted)

Parameter	Symbol	Rating	Unit
Input Voltage	V_I	35	V
Maximum Output Current	I_O	0.5	A
Thermal Resistance, Junction-to-Ambient	R_{thJA}	80	°C/W
Operating Junction Temperature Range	T_{OPR}	-25 to 125	°C
Storage Temperature Range	T_{STG}	-65 to 150	

■ Electrical Characteristics at Specified Virtual Junction Temperature

($V_i = 11\text{V}$, $I_o = 350\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_O	25°C	5.75	6	6.25	V
		8V ≤ V_i ≤ 21V, 5mA ≤ I_o ≤ 350mA	-25 ~ 125°C	5.7	6	
Load Regulation	△ V_O	5mA ≤ I_o ≤ 500mA	25°C		120	mV
		5mA ≤ I_o ≤ 200mA	25°C		60	
Line Regulation	△ V_O	8V ≤ V_i ≤ 25V, $I_o = 200\text{mA}$	25°C		100	mV
		9V ≤ V_i ≤ 25V, $I_o = 200\text{mA}$	25°C		50	
Quiescent Current	I_Q	25°C		6		mA
Quiescent Current Change	△ I_Q	9V ≤ V_i ≤ 25V, $I_o = 200\text{mA}$	-25 ~ 125°C		0.8	mA
		5mA ≤ I_o ≤ 350mA	-25 ~ 125°C		0.5	
Output Noise Voltage	V_N	10Hz ≤ f ≤ 100kHz	25°C	45		µV/V _O
Ripple Rejection	RR	9V ≤ V_i ≤ 19V, f = 120Hz, $I_o = 300\text{mA}$	-25 ~ 125°C	59		dB
Dropout Voltage	V_d	$I_o = 350\text{mA}$	25°C	2		V
Short Circuit Current Limit	I_{SC}	$V_i = 11\text{V}$	25°C	270		mA
Peak Current	I_{PK}		25°C	0.5		A

* Pulse test.

■ Marking

Marking	KM06
---------	------

Three Terminal Positive Voltage Regulator KA280M06

■ Typical Characteristics

