


Surface Mount Switching Diode

KAL99(BAL99)

■ Features

- Fast switching speed
- Surface mount package
- Well suited for automated assembly process

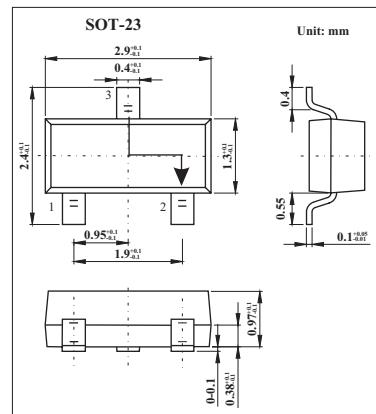

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Repetitive peak reverse voltage	V _{RRM}	70	V
Working peak reverse voltage	V _{RWM}	70	V
DC Blocking voltage	V _R	70	V
Peak forward surge current t=1 μ s	I _{FSM}	2	
t=1ms		1	A
t=1s		0.5	
Average forward current	I _{FAV}	250	mA
Power dissipation	P _{tot}	350	mW
Thermal resistance.junction-to-ambient	R _{thJA}	357	K/W
Junction and storage temperature range	T _j , T _{stg}	-55 to +150	°C

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Conditions	Rating	Unit
Forward voltage	V _F	I _F = 1 mA I _F = 10 mA I _F = 50 mA I _F = 150 mA	0.715 0.855 1 1.25	V
Reverse current	I _R	V _R = 70 V V _R = 70 V; T _j = 150 °C V _R = 25 V; T _j = 150 °C	2.5 100 30	μA μA μA
Diode capacitance	C _d	f = 1 MHz; V _F =V _R = 0 V;	1.5	pF
Reverse recovery time	t _{rr}	I _F =I _R =10mA to I _R =1mA, R _L =100 Ω, V _R =6V	6	ns

■ Marking

Marking	KJF
---------	-----