


## NPN Transistors

### PZT2222A (KZT2222A)

#### ■ Features

- Epitaxial planar die construction
- Complementary to PZT2907A

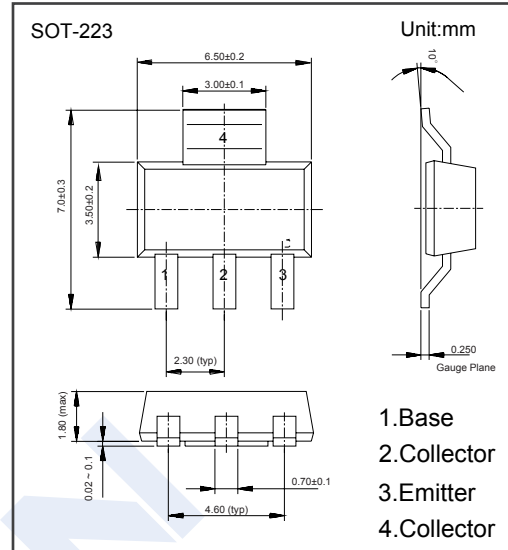

#### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	$V_{CB0}$	75	V
Collector - Emitter Voltage	$V_{CE0}$	40	
Emitter - Base Voltage	$V_{EB0}$	6	
Collector Current - Continuous	$I_C$	600	mA
Collector Power Dissipation	$P_C$	1	W
Junction Temperature	$T_J$	150	°C
Storage Temperature Range	$T_{stg}$	-55 to 150	

## NPN Transistors

### PZT2222A (KZT2222A)

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V <sub>CB0</sub>	I <sub>c</sub> = 100 μA, I <sub>E</sub> = 0	75			V
Collector- emitter breakdown voltage	V <sub>CE0</sub>	I <sub>c</sub> = 10 mA, I <sub>B</sub> = 0	40			
Emitter - base breakdown voltage	V <sub>EB0</sub>	I <sub>E</sub> = 100 μA, I <sub>C</sub> = 0	6			
Collector-base cut-off current	I <sub>CB0</sub>	V <sub>CB</sub> = 75 V, I <sub>E</sub> = 0			100	nA
Collector cut-off current	I <sub>CEx</sub>	V <sub>CE</sub> = 60 V, V <sub>EB(off)</sub> =-3V			100	
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> = 6V, I <sub>c</sub> =0			100	
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>c</sub> =150 mA, I <sub>B</sub> =15mA			0.3	V
		I <sub>c</sub> = 500 mA, I <sub>B</sub> = 50mA			1	
Base - emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>c</sub> =150 mA, I <sub>B</sub> =15mA			1.2	
		I <sub>c</sub> = 500 mA, I <sub>B</sub> = 50mA			2	
DC current gain	h <sub>FE(1)</sub>	V <sub>CE</sub> = 10V, I <sub>c</sub> = 0.1mA	35			
	h <sub>FE(2)</sub>	V <sub>CE</sub> = 10V, I <sub>c</sub> = 1mA	50			
	h <sub>FE(3)</sub>	V <sub>CE</sub> = 10V, I <sub>c</sub> = 10mA	75			
	h <sub>FE(4)</sub>	V <sub>CE</sub> = 10V, I <sub>c</sub> = 150mA	100		300	
	h <sub>FE(5)</sub>	V <sub>CE</sub> = 1V, I <sub>c</sub> = 150mA	50			
	h <sub>FE(6)</sub>	V <sub>CE</sub> = 10V, I <sub>c</sub> = 500mA	40			
Delay time	t <sub>d</sub>	V <sub>CC</sub> =30V, V <sub>BE(off)</sub> =-0.5V			10	nS
Rise time	t <sub>r</sub>	I <sub>c</sub> =150mA, I <sub>B1</sub> =15mA			25	
Storage time	t <sub>s</sub>	V <sub>CC</sub> =30V, I <sub>c</sub> =150mA, I <sub>B1</sub> =-I <sub>B2</sub> =15mA			225	
Fall time	t <sub>f</sub>				60	
Collector output capacitance	C <sub>ob</sub>	V <sub>CB</sub> = 10V, I <sub>E</sub> = 0, f=1MHz			8	pF
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = 20V, I <sub>c</sub> = 20mA, f=100MHz	300			MHz