


Schottky Diodes

SS52 ~ SS520

■ Features

- Reverse Voltage - 20 to 200 V
- Forward Current - 5.0 A
- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

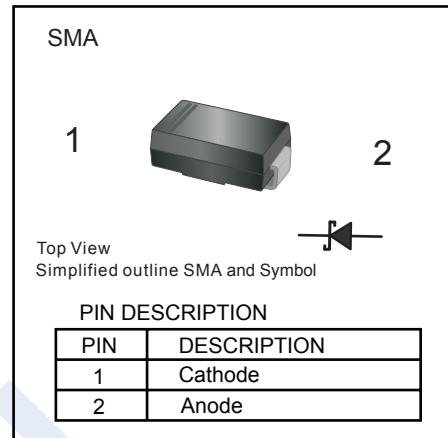

■ Absolute Maximum Ratings and Electrical characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	SS52	SS54	SS56	SS58	SS510	SS512	SS515	SS520	Unit						
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V						
Maximum RMS voltage	V_{RMS}	14	28	42	56	70	84	105	140							
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200							
Maximum Instantaneous Forward Voltage at 5A	V_F	0.55		0.70		0.85										
Maximum Averaged Forward Rectified Current	$I_{F(AV)}$	5.0								A						
Peak Forward Surge Current, 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I_{FSM}	150														
Maximum DC Reverse Current $T_a=25^\circ\text{C}$ at rated DC blocking voltage $T_a=100^\circ\text{C}$	I_R	1.0 50								mA						
Typical Junction Capacitance *1	C_J	500		300						pF						
Typical Thermal Resistance *2	$R_{\theta JA}$	60														
Operating Junction Temperature Range	T_J	-55 ~ +125								°C						
Storage Temperature Range	T_{stg}	-55 ~ +150														

* 1 Measured at 1MHz and applied reverse voltage of 4V D.C.

* 2 P.C.B. mounted with 2.0" × 2.0" (5×5 cm) copper pad areas.

■ Marking

NO.	SS52	SS54	SS56	SS58	SS510	SS512	SS515	SS520
Marking	SS52	SS54	SS56	SS58	SS510	SS512	SS515	SS520

Schottky Diodes

SS52 ~ SS520

■ Typical Characteristics

Fig.1 Forward Current Derating Curve

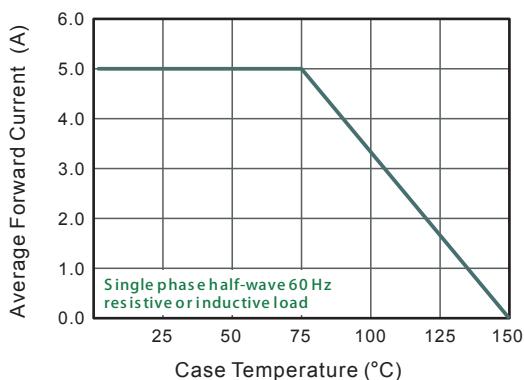


Fig.2 Typical Reverse Characteristics

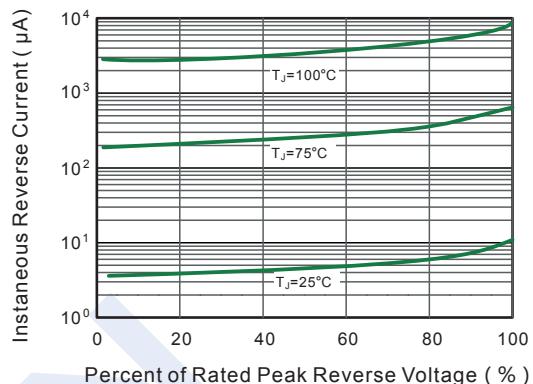


Fig.3 Typical Forward Characteristic

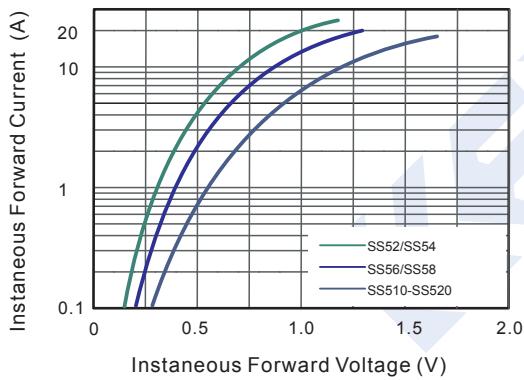


Fig.4 Typical Junction Capacitance

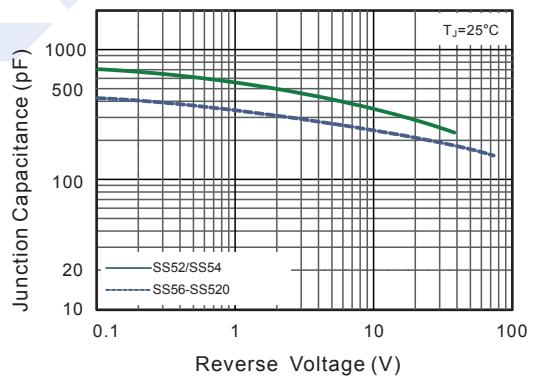


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


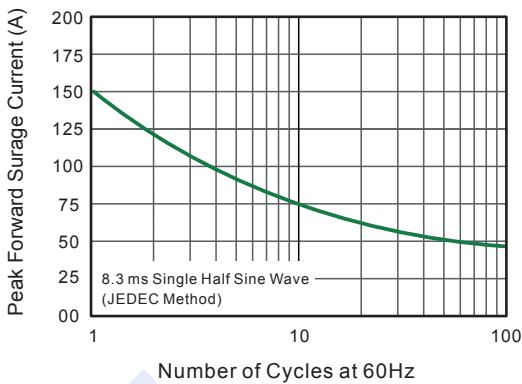


Fig.6- Typical Transient Thermal Impedance

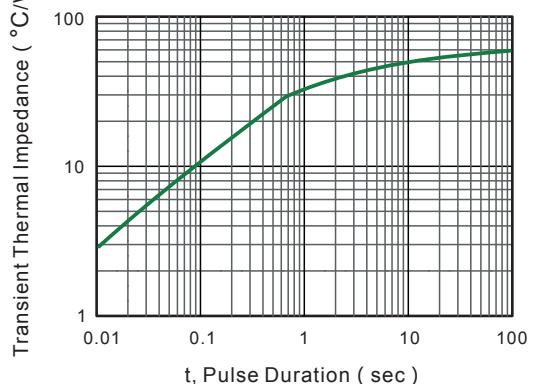


Schottky Diodes

SS52 ~ SS520

■ Package Outline Dimensions

Plastic surface mounted package; 2 leads

SMA

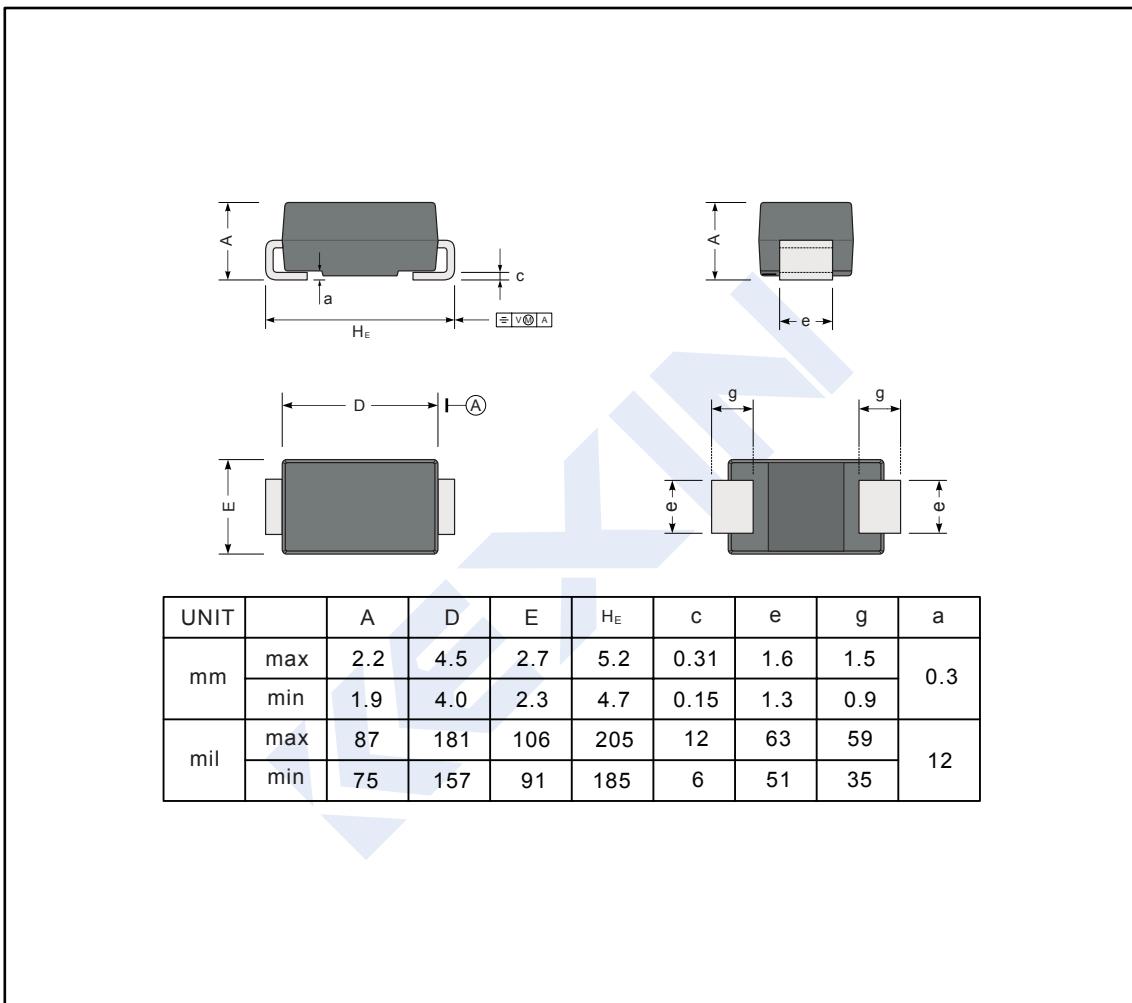

■ The recommended mounting pad size

