
SOD-323 Tape and Reel Data

1. SOD-323 Packing Configuration:



Packaging Description

SOD-323 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, Adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.7cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated). This and some other options are further described in the Packaging Information table. These full reels are individually barcode labeled and placed inside a standard intermediate box made of recyclable corrugated brown paper. One box contains ten reels maximum. And these boxes are placed inside a barcode labeled shipping box which comes in different sizes depending on the number of parts shipped.

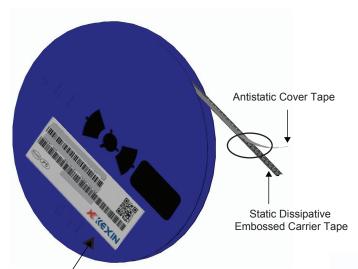


Label

SOD-323 Unit Orientation




182mm x 182mm x 135mm Inner box(10 Reels per box)

2. SOD-323 Tape Leader and Trailer Configuration:

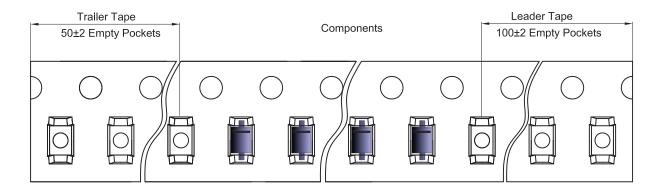


SOD-323 Tape and Reel Data

3. SOD-323 Embossed Carrier Tape Configuration:

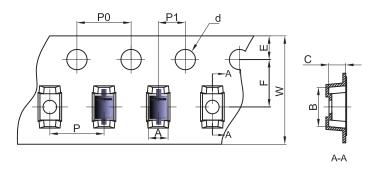

Dimensions are in millimeter										
Pkg type	Α	В	С	d	E	F	P0	Р	P1	W
SOD-323	1.48	3.3	1.25	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

4. SOD-323 Reel Configuration:

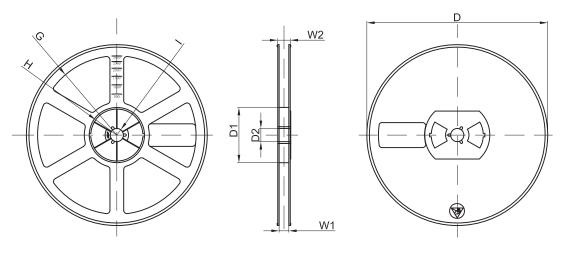

Dimensions are in millimeter									
Reel Option	D	D1	D2	G	Н	Ī	W1	W2	
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30	

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	