


Schottky Diodes

1KK2302B ~ 1KK2320B

■ Features

- Reverse Voltage - 20 to 200 V
- Forward Current - 3.0 A
- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

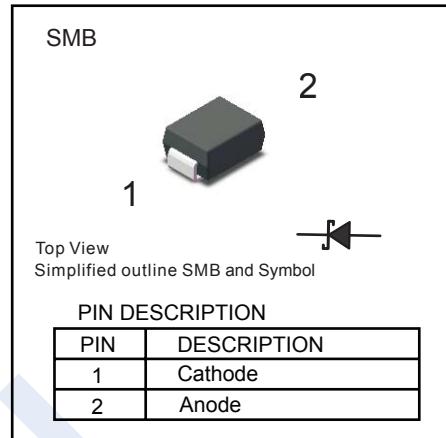

■ Absolute Maximum Ratings and Electrical characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	1KK 2302B	1KK 2304B	1KK 2306B	1KK 2308B	1KK 2310B	1KK 2312B	1KK 2315B	1KK 2320B	Unit				
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V				
Maximum RMS voltage	V_{RMS}	14	28	42	56	70	84	105	140					
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200					
Maximum Instantaneous Forward Voltage at 3A	V_F	0.55		0.70		0.85		0.95						
Maximum Averaged Forward Rectified Current	$I_{F(AV)}$	3.0							A	mA				
Peak Forward Surge Current, 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I_{FSM}	80												
Maximum DC Reverse Current $T_a=25^\circ\text{C}$ at rated DC blocking voltage $T_a=100^\circ\text{C}$	I_R	0.5		0.3		3								
Typical Junction Capacitance *1	C_j	450		400						pF				
Typical Thermal Resistance *2	R_{JA}	65							$^\circ\text{C}/\text{W}$					
Operating Junction Temperature Range	T_j	$-55 \sim +150$							$^\circ\text{C}$					
Storage Temperature Range	T_{stg}	$-55 \sim +150$												

* 1 Measured at 1MHz and applied reverse voltage of 4V D.C.

* 2 P.C.B. mounted with 2.0" \times 2.0" (5 \times 5 cm) copper pad areas.

■ Marking

NO.	1KK 2302B	1KK 2304B	1KK 2306B	1KK 2308B	1KK 2310B	1KK 2312B	1KK 2315B	1KK 2320B
Marking	3B02	3B04	3B06	3B08	3B10	3B12	3B15	3B20

Schottky Diodes

1KK2302B ~ 1KK2320B

■ Typical Characteristics

Fig.1 Forward Current Derating Curve

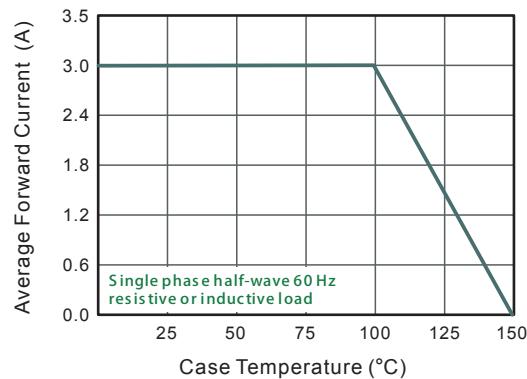


Fig.2 Typical Reverse Characteristics

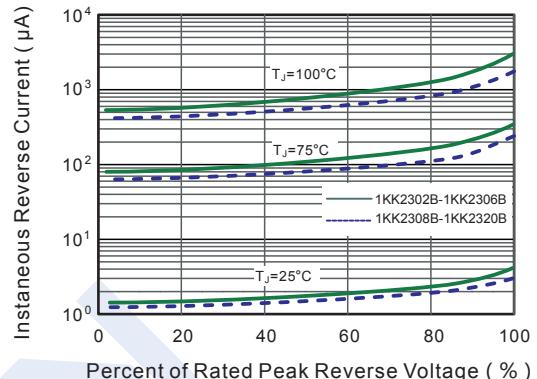


Fig.3 Typical Forward Characteristic

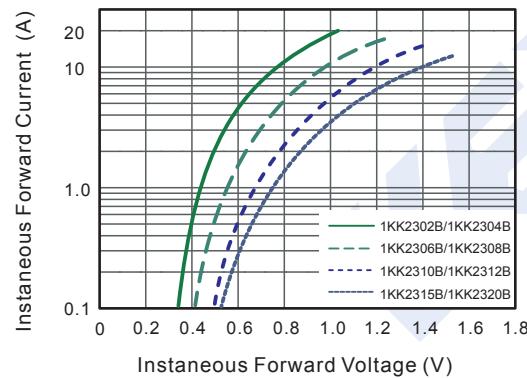


Fig.4 Typical Junction Capacitance

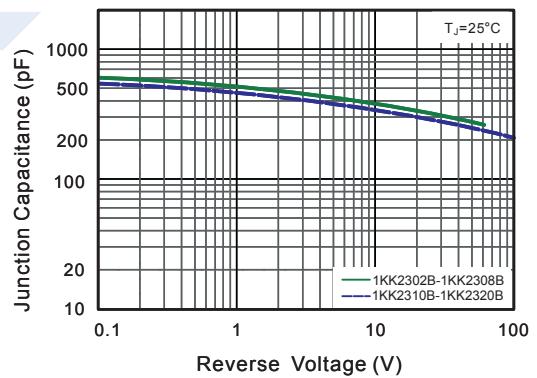


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


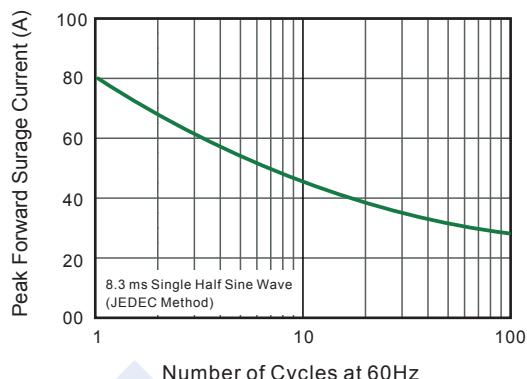


Fig.5- Typical Transient Thermal Impedance

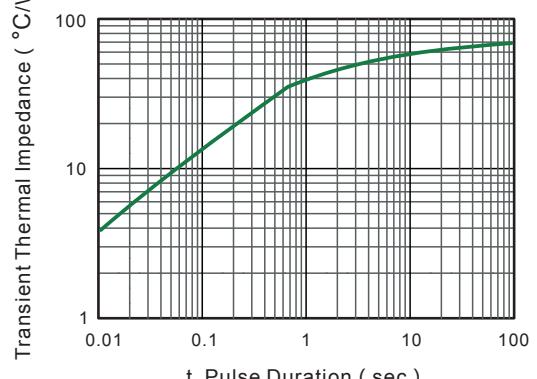


Schottky Diodes

1KK2302B ~ 1KK2320B

■ Package Outline Dimensions

Plastic surface mounted package; 2 leads

SMB

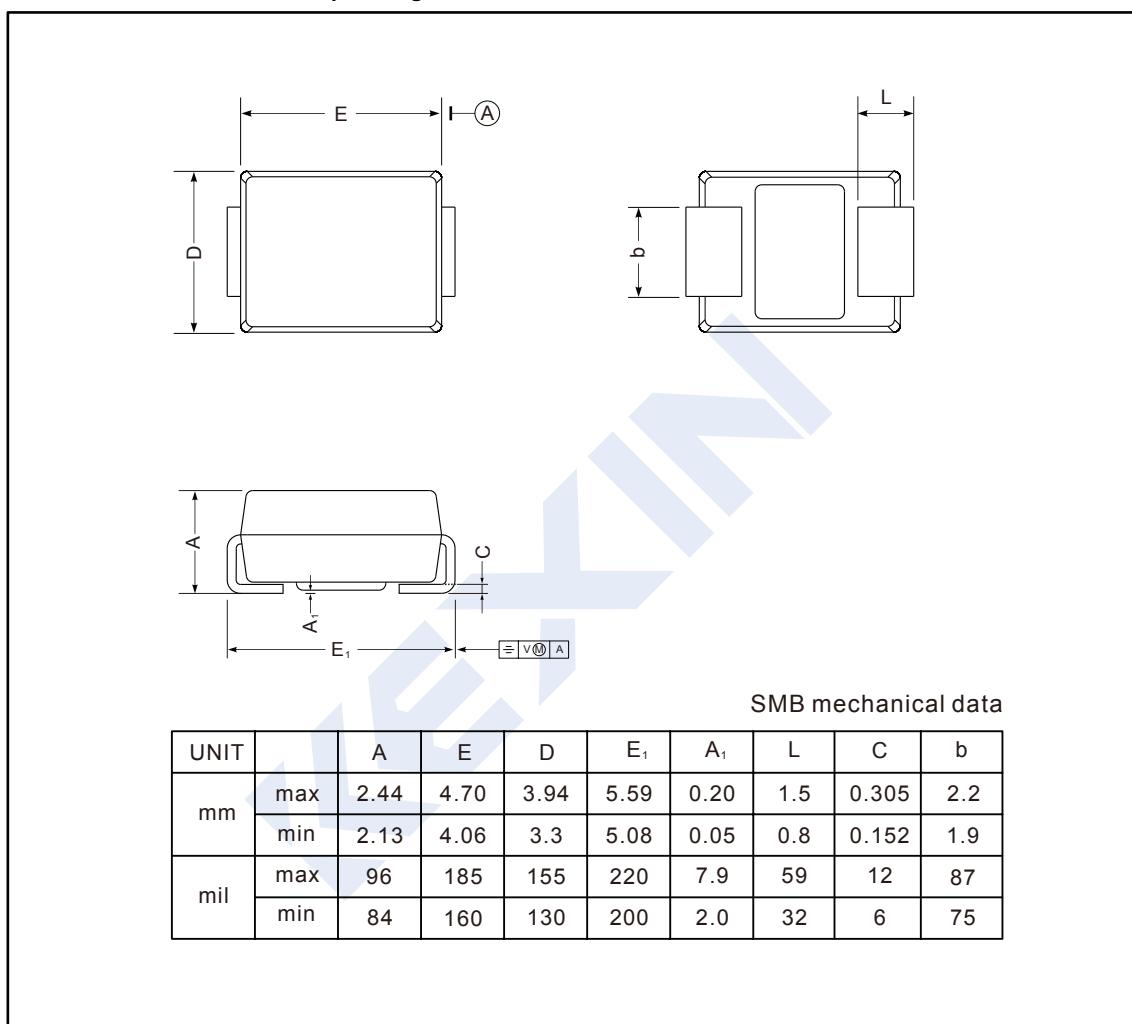

■ The Recommended Mounting Pad Size

